

Description:

System dividing walls are used on the inside of buildings as non-bearing walls to separate spaces for storerooms, parking spaces in multi-storey garages or to enclose areas in industrial warehouses. The type filling consists of a welded wire mesh protected with zinc. The panel is additionally powder-coated in RAL 9006 colour.

Characteristics/colour:


Structural components:
zinc plating
Filling: RAL 9006




AESTHETICS - SAFETY



PADLOCK HOLDERS

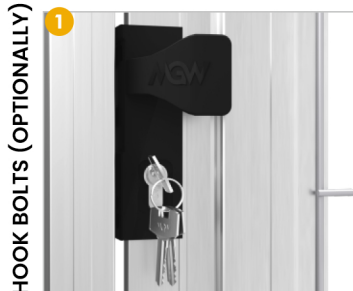

HOOK BOLTS (OPTIONALLY)

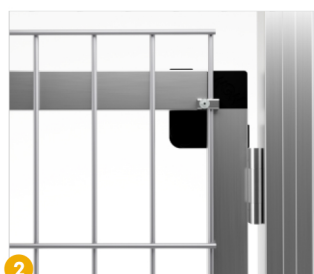


CORNER PROTECTION

Partition height:

Standard: 2200 mm, 2200 mm, 2400 mm

Opening height:

Standard: 2000 mm

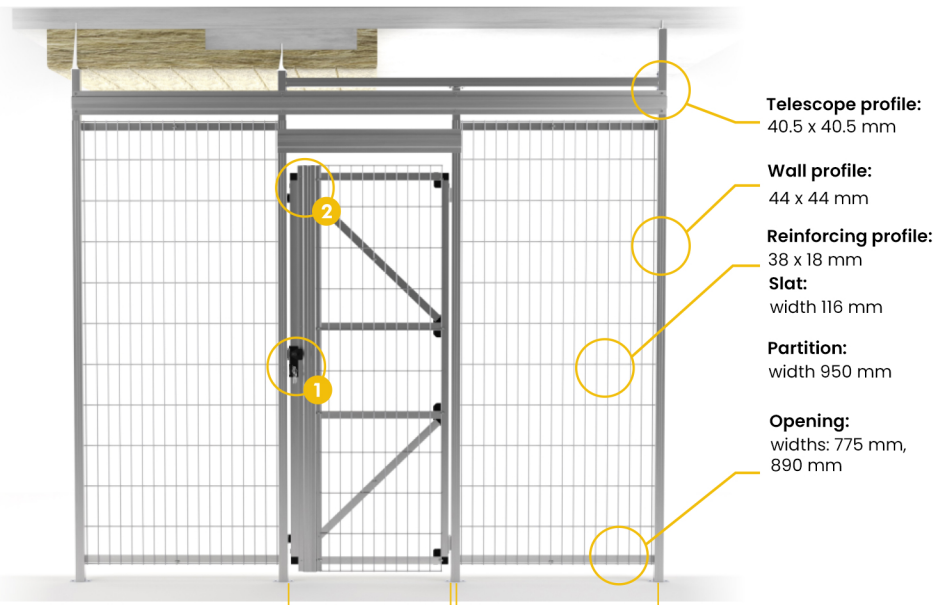

Bottom clearance:
Partitions: 20 - 50 mm
Openings: 20 - 50 mm

Width between the posts:
800 mm; 915 mm

Center-to-center spacing of the posts:
1000 mm